

* STANDARD FEATURES *

- Removes separable solids larger than 50 micron (325 mesh) and 20% heavier than liquid
- Accomodates flow rates from 40 to 73 US GPM
- 150 PSI working pressure
- Carbon steel construction
- Fully pressure tested


* AVAILABLE OPTIONS *

- 150# Flanged Inlet & Outlet
- Bracket Mounting
- Foot Mounting
- Inlet/Outlet Pressure Gauges
- Automatic purge valve with timer
- ASME certified for 150 PSIG @ 210°F
- 304 or 316 Stainless Steel construction

* PRESSURE DROP *

To determine pressure drop (PSI) at known flow rates, use the following formula:

$$\Delta P = \left(\frac{\text{GPM}}{23} \right)^2$$

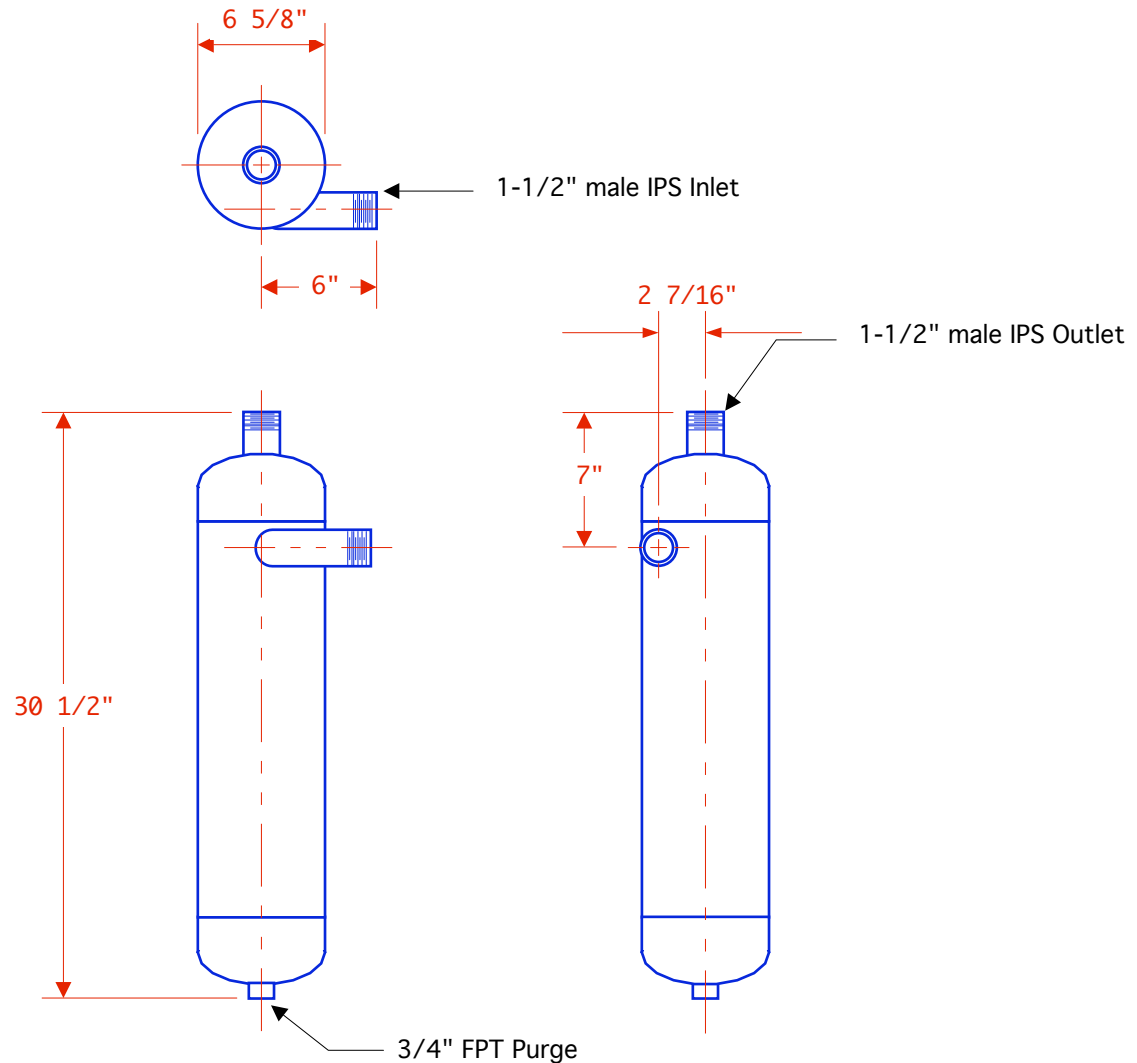

Weight: 49 lbs (empty)
78 lbs (full)
Volume: 3.4 gallons

Note - All dimensions are approximate and are subject to change without notice.

TOWER-FLO
Water Filter Systems

TITLE: TFS-0150 Centrifugal Separator

PROJECT:

DWG BY: GSB

DATE: 1/31/09