

* STANDARD FEATURES *

- Removes separable solids larger than 50 micron (325 mesh) and 20% heavier than liquid
- Accommodates flow rates from 59 to 110 US GPM.
- 150 PSI working pressure
- Carbon steel construction
- Fully pressure tested


* AVAILABLE OPTIONS *

- 150# Flanged Inlet & Outlet
- Bracket Mounting
- Foot Mounting
- Inlet/Outlet Pressure Gauges
- Automatic purge valve with timer
- ASME certified for 150 PSIG @ 225°F
- 304, 316 Stainless Steel construction

* PRESSURE DROP *

To determine pressure drop (PSI) at known flow rates, use the following formula:

$$\Delta P = \left(\frac{\text{GPM}}{34} \right)^2$$

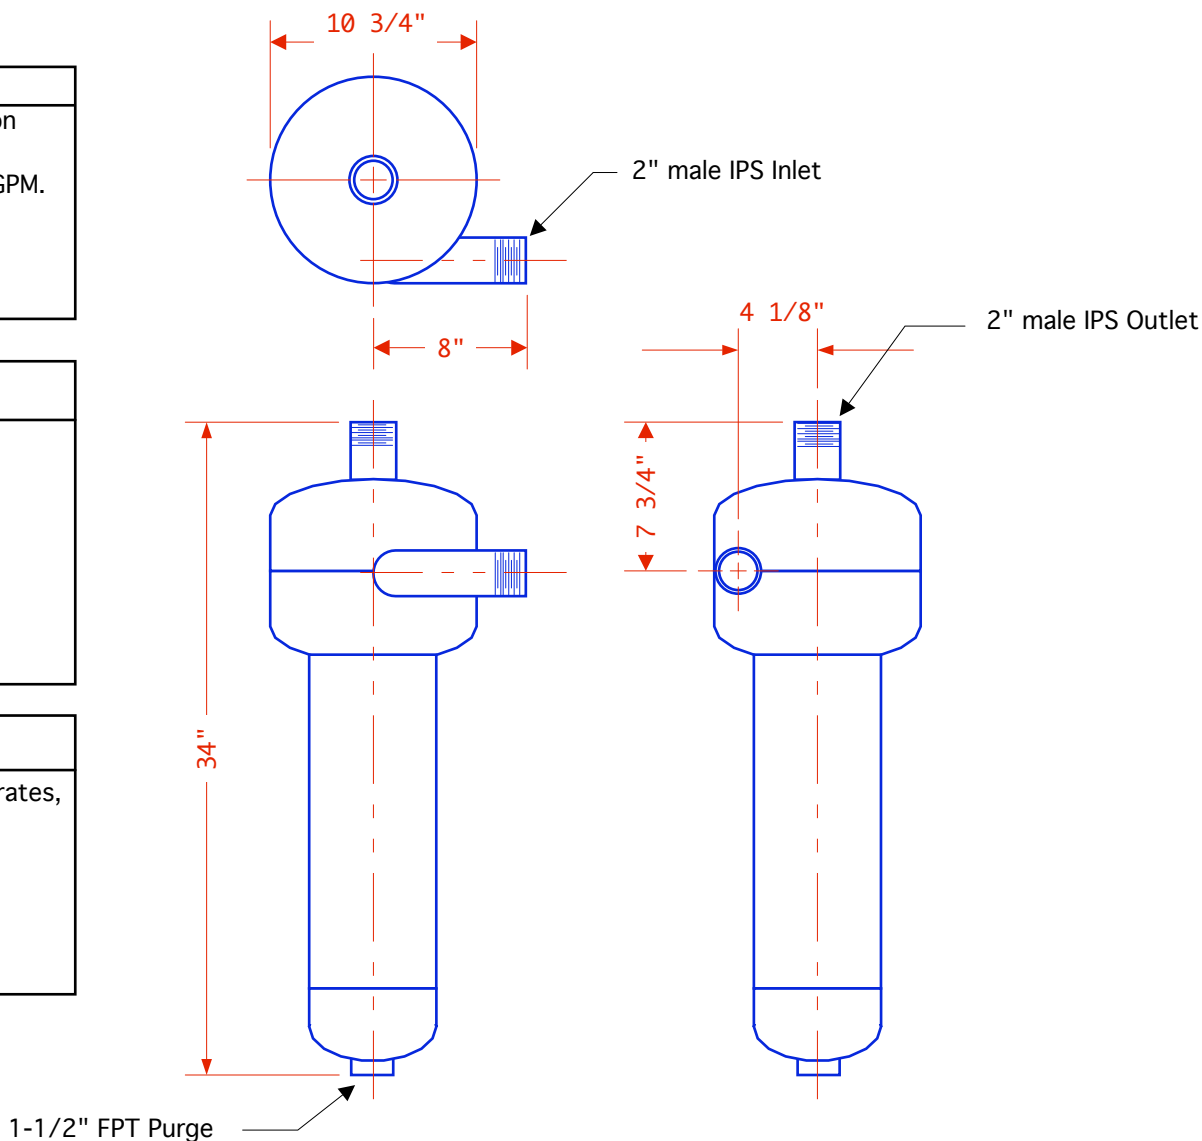

Net Weight: 68 lbs
Weight (full): 113 lbs
Volume: 5.5 gals

Note - All dimensions are approximate and are subject to change without notice.

TOWER-FLO®
Water Filter Systems

TITLE: TFS-0200 Centrifugal Separator

PROJECT:

DWG BY: GSB

DATE: 1/31/09

by UNITED INDUSTRIES, INC. • 202 E. Cleveland • Sterling, KS 67579 • 800-835-3272 • 620-278-3160 • Fax: 800-500-3115 • 620-278-3115 • www.towerflo.com •