

\* STANDARD FEATURES \*

- Removes separable solids larger than 50 micron (325 mesh) and 20% heavier than liquid
- Accomodates flow rates from 260 to 480 US GPM
- 150 PSI working pressure
- Carbon steel construction
- Fully pressure tested
- Support Legs


\* AVAILABLE OPTIONS \*

- Inlet/Outlet Pressure Gauges
- Clean Out Ports
- Automatic purge valve with timer
- ASME certified for 150 PSIG @ 210°F
- 304 or 316 Stainless Steel construction

\* PRESSURE DROP \*

To determine pressure drop (PSI) at known flow rates, use the following formula:

$$\Delta P = \left( \frac{\text{GPM}}{152} \right)^2$$

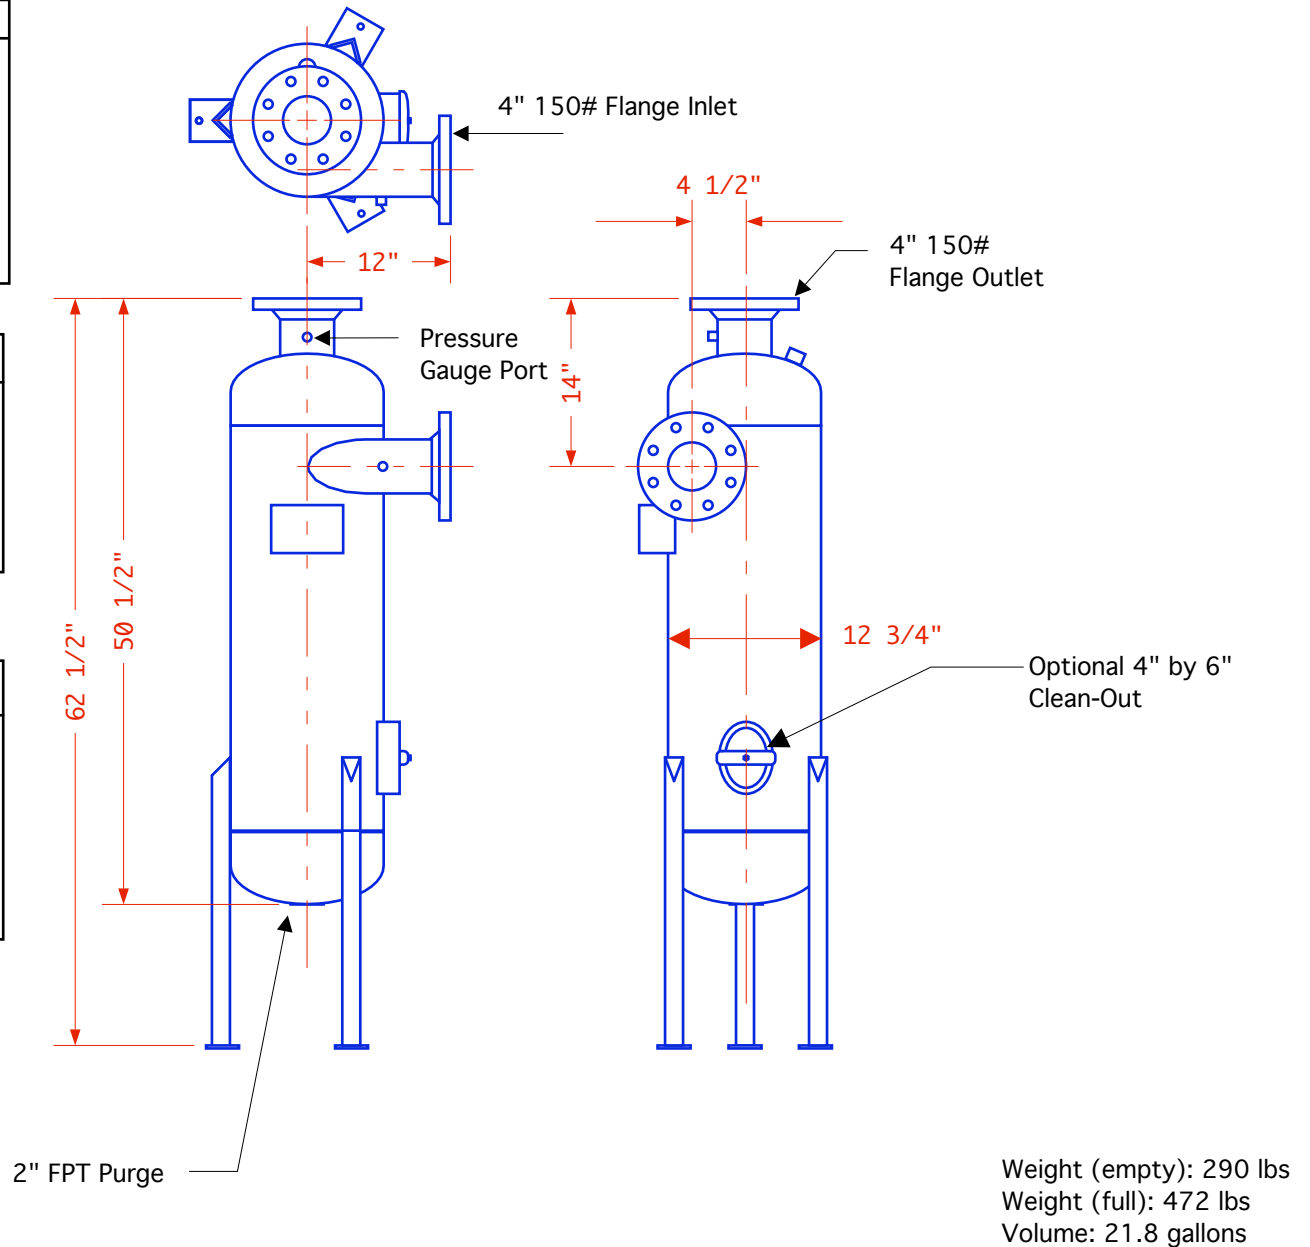

Note - All dimensions are approximate and are subject to change without notice.



TITLE: TFS-0400 Centrifugal Separator

PROJECT:

DWG BY: GSB

DATE: 1/31/09